


**Stitch Joint Detail**

**M-164**

No Scale—05/06

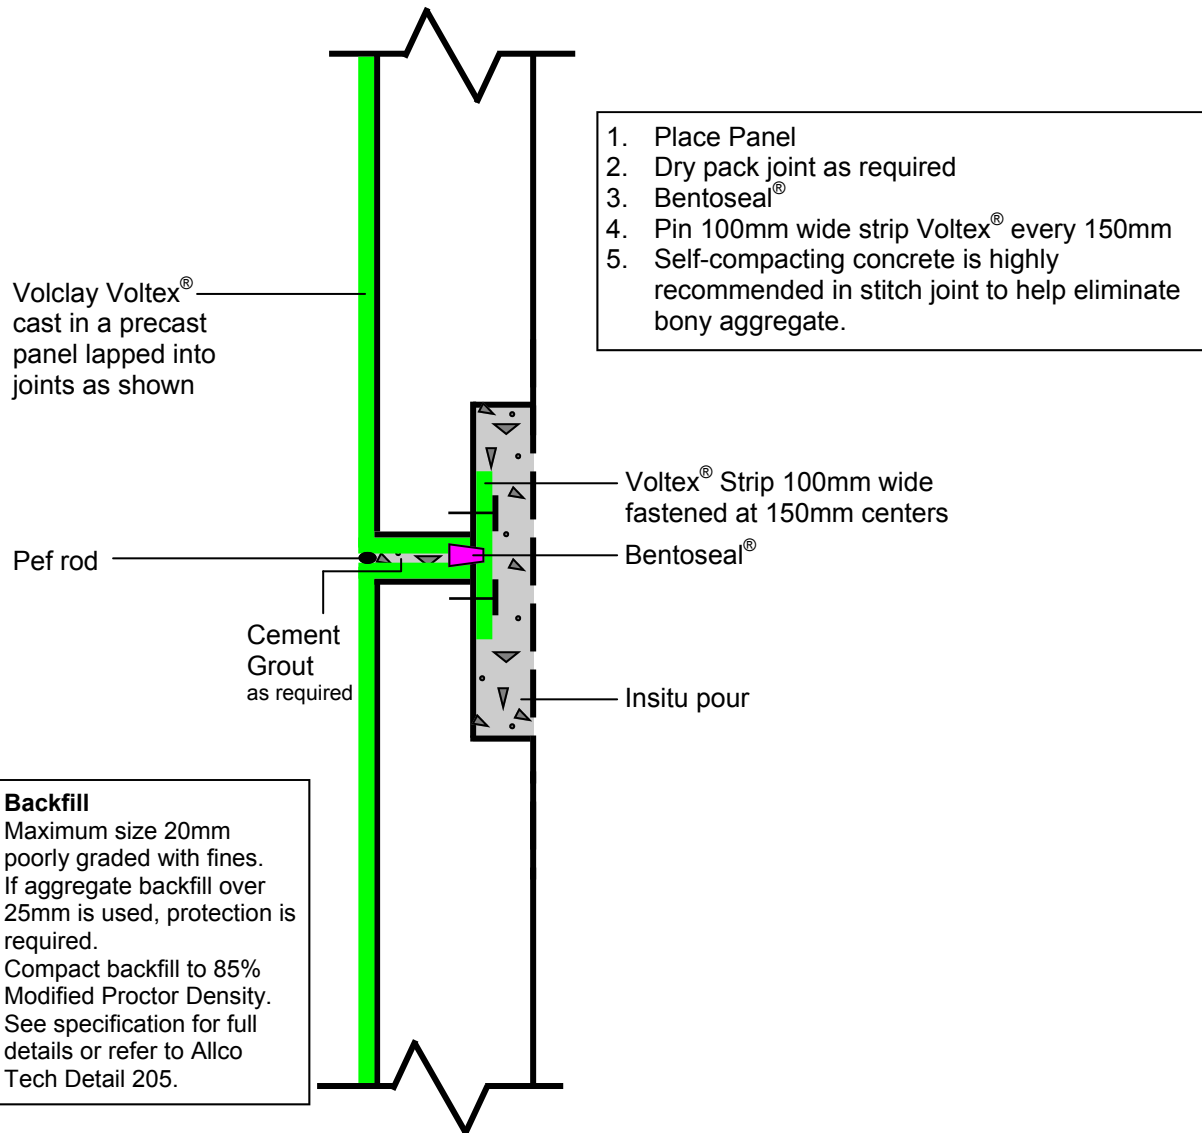

1. Place Panel
2. Dry pack joint as required
3. Bentoseal®
4. Pin 100mm wide strip Voltex® every 150mm
5. Self-compacting concrete is highly recommended in stitch joint to help eliminate bony aggregate.

**Backfill**  
 Maximum size 20mm poorly graded with fines. If aggregate backfill over 25mm is used, protection is required. Compact backfill to 85% Modified Proctor Density. See specification for full details or refer to Allco Tech Detail 205.



The information and data contained herein are believed to be accurate and reliable. This information does not constitute a warranty and should be used in conjunction with the project specification document and Quality Assurance manual supplied by Allco Agencies Ltd. Please contact Allco Agencies Ltd with any questions or deviations from this information.  
 © Allco Agencies Ltd 2006



For Technical Advice Contact:

**Peter Stevens or  
 Alex Valentine**

(021) 420 225 (PS)  
 (021) 420 228 (AV)