



HORIZONTAL COLORSEAL™

U. S. Patent No. 5,130,176

TECHDATA


Manufacturer:

EMSEAL JOINT SYSTEMS, LTD
25 Bridle Lane
Westborough, MA 01581-2603
PH: 508-836-0280 FX: 508-836-0281

EMSEAL, LLC
120 Carrier Drive
Toronto, Ontario, Canada M9W 5R1
PH: 416-740-2090 FX: 416-740-0233

Product Description

- **HORIZONTAL COLORSEAL** is an evolution of EMSEAL's COLORSEAL product with reduced compression in the expanding foam backing, field-applied epoxy adhesive on the joint faces, and a field-applied silicone corner-bead between the silicone "bellows" sealing element and the substrates.
- **HORIZONTAL COLORSEAL** is produced by coating an acrylic-impregnated open-cell polyurethane foam with silicone.
- The expanding foam is a patent-pending acrylic adhesive infused into the cellular foam base material. This new chemistry incorporates a hydrophobic microsphere component never before available in a sealant formulation.
- The silicone external facing is factory applied at a width greater than maximum joint extension and is cured before final compression.
- When compressed, a bellows is created in the coating. As the joint moves, the bellows fold and unfold; the silicone primary seal is thus virtually NEVER IN TENSION.
- **HORIZONTAL COLORSEAL** is supplied in shrink-wrapped lengths (sticks). It is precompressed to less than the joint size. After insertion, it expands against the joint faces.
- Non-invasive anchoring and sealing against the substrate is achieved through a combination of the back-pressure caused by the stored strain energy of compression in the foam backing, the field-applied epoxy adhesive, and the field installation of a corner bead of silicone at the substrate-to-bellows interface.

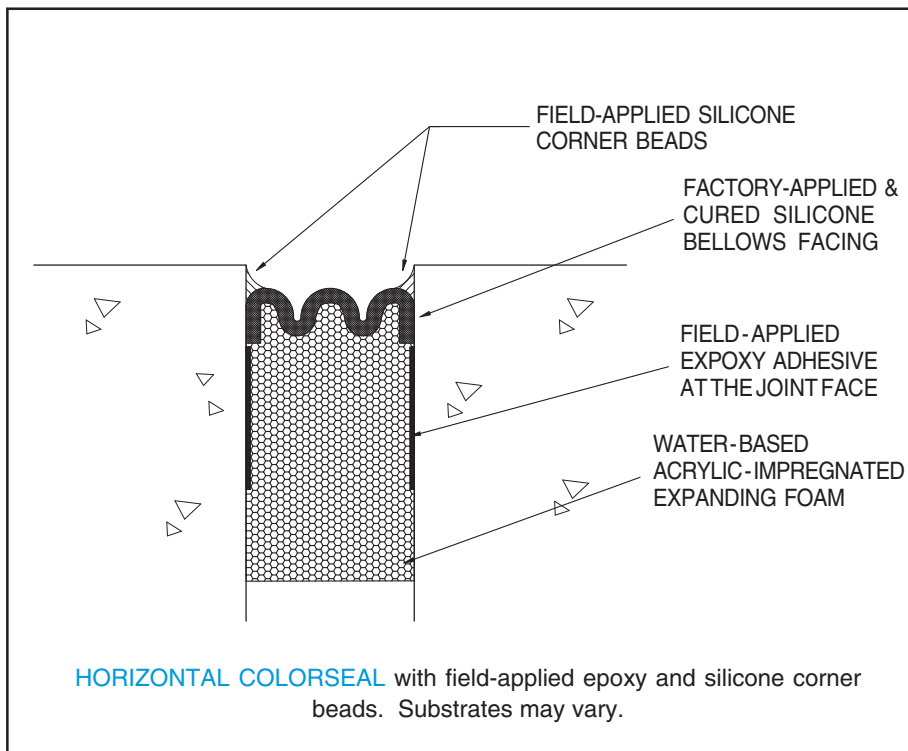

Uses

As a watertight seal in joints including:

- Decks: structural joints, perimeter joints, isolation joints at stair-towers/elevators
- Parapets, roofs
- Concrete covers on above-grade tunnels, wastewater tanks etc.
- Back-up seal beneath expansion joint-cover assemblies
- For aesthetically compatible transitions to joints in the vertical plane see tech data sheets for COLORSEAL & SEISMIC COLORSEAL

Advantages

- Features the UV resistance, durability and impermeability of silicone.
- Virtually eliminates tensile stresses at

sealant bond line and adverse effects of movement occurring before curing in typical sealant-and-backer-rod applications.

- Both mechanically and chemically anchored through back-pressure inherent in the permanently elastic open-cell foam and the adhesion of the epoxy adhesive and through the field-applied silicone corner bead.
- Reduces installation labor and materials, such as need for accurate positioning of a backer-rod, site mixing, tooling etc.
- Twelve standard colors (consult Dow Corning 790 color-chart or contact EMSEAL).
- Supplied precompressed to less than joint size—no field compression required.

Table 1: Typical Physical Properties & Testing

Property / Test	Value	Test Method
Colors	Standard: Precast white, limestone, black, gray, natural stone, bronze, sandstone, adobe tan, dusty rose, rustic brick, blue spruce, charcoal	
Durometer Hardness	Silicone Coating: Shore A, 15 pts.	ASTM D2240
Staining	None	ASTM C510
Weatherometer	Xenon Arc Weatherometer	ASTM G26-77
	2000 hrs-No visible deterioration	
Primary Surface Weathering	Atlas Weatherometer	ASTM G26-77
	6000 hrs-Minimal hardness change	
Temperature Range		
High Permanent	185°F (85°C)	ASTM C711
Low Permanent	-40°F (-40°C)	
Tensile Strength	21 psi min; 145 kPa	ASTM D3574
Thermal Conductivity	0.34 Btu. in/hr. ft² °F (0.05 W/m.°C)	ASTM C518

CAD Drawings & Guide Specs Availability

Guide specifications and CAD details are available from EMSEAL by email on request and at www.emseal.com.

Availability & Price

HORIZONTAL COLORSEAL is available for shipment internationally. Prices are available from local representatives or direct from the manufacturer. The product range is continually being updated, and accordingly EMSEAL® reserves the right to modify or withdraw any product without prior notice.

Limitations

- Metal coverplates (by others) must be installed above HORIZONTAL COLORSEAL where spiked-high-heel pedestrian traffic, or other high-point-load/small-contact-surface area loads are anticipated.
- As an alternative to cover plates for pedestrian heel-traffic applications, 'heel-traffic-resistant' wet sealant (by others) installed over a bond-breaker tape above recessed HORIZONTAL COLORSEAL may be considered.
- If movement exceeds ±50% (100% total) of joint-gap size at mean temperature, integrity of seal will be affected.
- Capable of lateral ("shear") movements up to ±50% (total 100%) of joint size at mean temperature.
- Standard sizes from 1/2" (12mm) to 6" (150mm). Other sizes available subject to review of application: consult EMSEAL Technical Services.

- Remove shrink-wrap packaging, hardboard, and self-adhesive release paper.
- Wipe factory-applied release agent off silicone facing using clean, lint-free rag made damp with toluene.
- Apply thin bead of silicone sealant along edge of bellows at end where the material will join with next length.
- Insert material into joint with at least a 1/4" (6mm) recess and adhere to one side. Material expands to seal joint. (Wedge larger-sized material in place while it expands.)
- Blend silicone at joins into the silicone bellows to create a consistent finished appearance being sure not to restrict the folds of the bellows.
- Once material has equalized its expansion across the joint, gun and tool a 1/4" x 1/4" (4mm x 4mm) corner bead at the substrate-to-bellows interface (see Fig. 1). (Note: unpainted metal surfaces and some natural stone surfaces may require priming -- consult EMSEAL.)

Installation

IMPORTANT: The following instruction-summary is generic. Refer to "Install Data: Horizontal Colored" and job-specific instruction of EMSEAL technician for complete procedures.

- Store indoors at room temperature. Expansion is quicker when warm, slower when cold.
- Ensure material nominal size matches joint size.
- Mix epoxy now and trowel onto joint faces.

Warranty

Standard or project-specific warranties are available from EMSEAL on request.

Table 2: HORIZONTAL COLORSEAL Sizing

Nominal Material Size (Joint Size at Mean T°F)	Depth of Seal
1/2" (12mm)	1-1/2" (40mm)
3/4" (20mm)	1 1/2" (40mm)
1" (25mm)	1-1/2" (40mm)
1-1/2" (40mm)	2-1/4" (55mm)
2" (50mm)	2-1/2" (65mm)
2-1/2" (65mm)	2-3/4" (70mm)
3" (75mm)	3-1/2" (90mm)
3-1/2" (90mm)	3-3/4" (95mm)
4" (100mm)	4-1/2" (115mm)
4-1/2" (115mm)	5" (125mm)
5" (125mm)	5-1/2" (140mm)
5-1/2" (140mm)	5-3/4" (145mm)
6" (150mm)	5-3/4" (145mm)
6-1/2" (165mm)	5-3/4" (145mm)
7" (175mm)	5-3/4" (145mm)
7-1/2" (190mm)	5-3/4" (145mm)
8" (200mm)	5-3/4" (145mm)

Over 8" consult EMSEAL Technical Services.

- Select nominal material size to correspond to joint-gap size at mean temperature.
- Material is supplied in shrink-wrapped sticks of 6.56 ft. (2 M).

"Dow Corning" is a registered trademark of Dow Corning Corporation, Midland, MI

