


CONCRETE SUBSTRATE.
REFER TO STRUCTURAL DRAWINGS.
TO BE FLUSH WITH NO VOIDS.
MASONRY TO BE FLUSH POINTED

IF THE MEMBRANE IS TO EXTEND
ABOVE THE PLANTER 'FILL' LEVEL IT
MUST TRANSITION TO CASALI
DERMAFIL 'CHIPPED' CAP SHEET TO
EXPOSED AREA

IT IS RECOMMENDED THAT THE
UPPER 300MM OF THE MEMBRANE
BE PROTECTED FROM MECHANICAL
DAMAGE.
E.G. AQUADRAIN 15X
OR FIBRE CEMENT

IT IS RECOMMENDED THAT THE
ADDITIONAL DRAINAGE BE
PROVIDED TO THE PLANTER
INNER LINING USING
AQUADRAIN 15X

IF DRAINAGE DESIGN INCLUDES
CLAMP OUTLETS, DRESS
MEMBRANE INTO CLAMP AREA

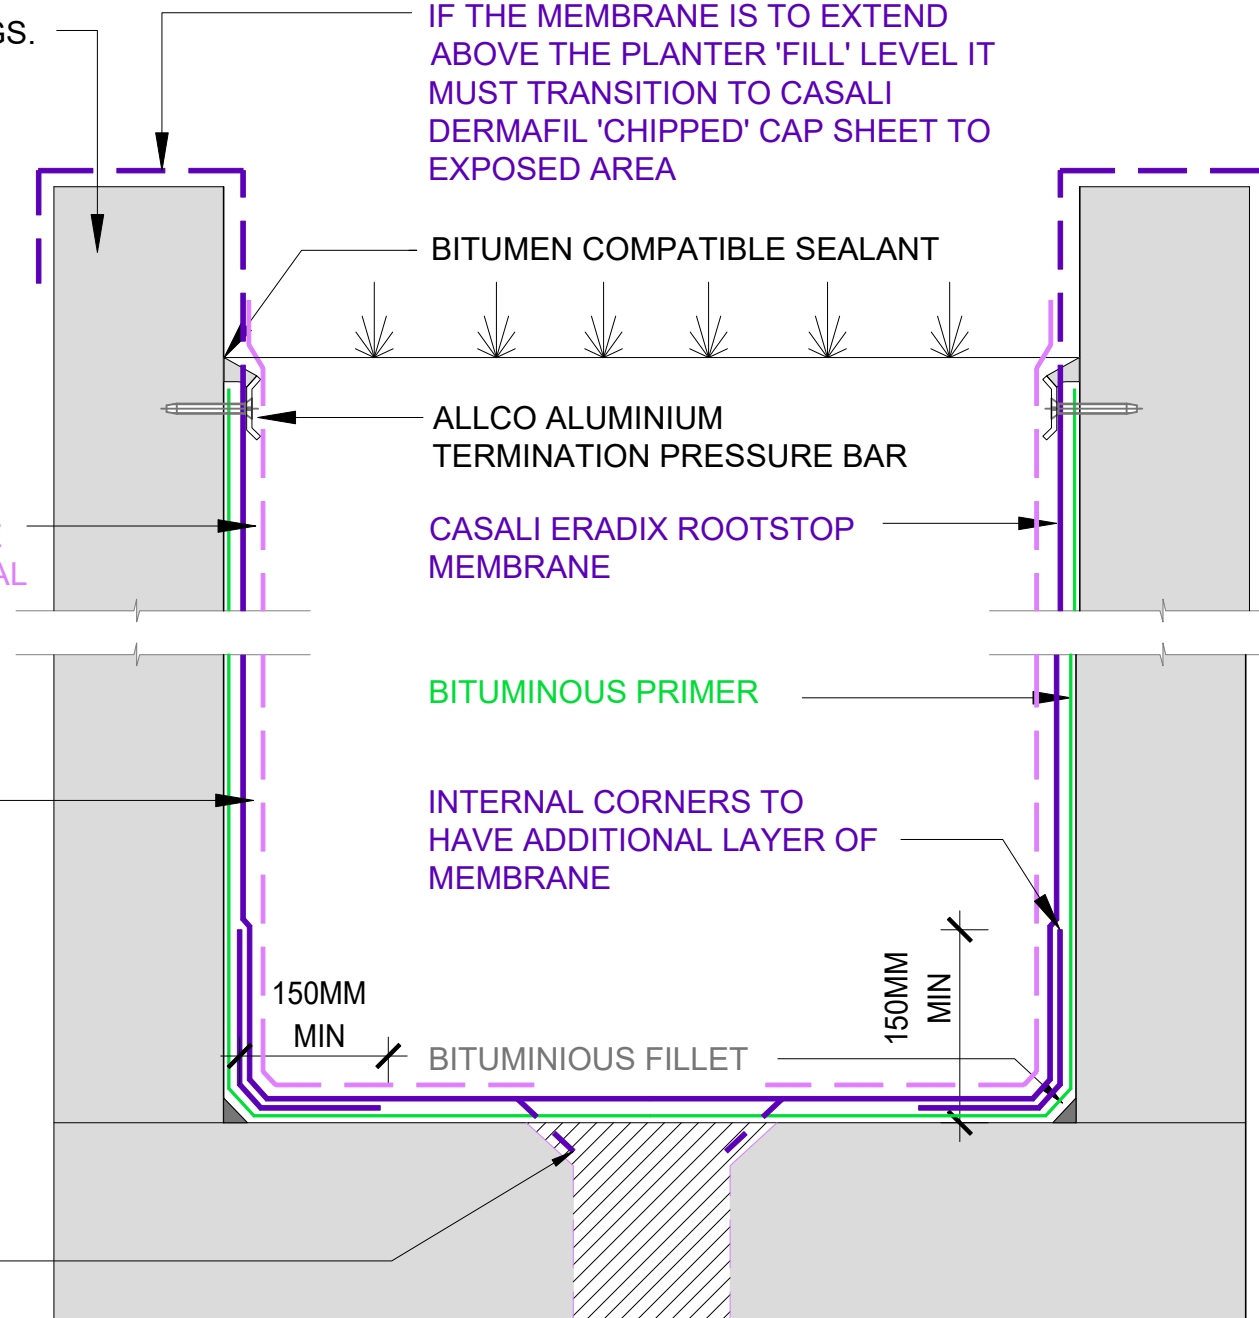

1

PLANTER BOX - ERABIX ROOT STOP MEMBRANE

SCALE: NTS



The information and data contained herein are believed to be accurate and reliable.
This information does not constitute a warranty and should be used in conjunction with
the project specification document supplied by Allco Waterproofing Solutions Ltd
Please contact Allco Waterproofing Solutions Ltd with any questions or deviations from
this information.
© Allco Waterproofing Solution Ltd

For Technical Advice Contact:
Web: www.allco.co.nz
Email: info@allco.co.nz
Telephone: 09 448 1185
Facsimile: 09 448 1186



DRAWN BY:
ALLCO

DATE:
10/2024

DRAWING REF:
CA-PS-16

REV:
1