



# EMSHIELD SecuritySeal-W2

**Vandalism / Water / Fire / Movement / Sound**

**TECH DATA**



SecuritySeal displayed in typical substrate.

## Product Description

SecuritySeal is a pick-resistant, watertight, 2-hour fire-rated, expansion joint for locations requiring a hardened tamper-resistant surface. Institutional walls such as those found in prisons, detention centers, medical and psychiatric hospitals, school facilities and day-care centers are some of the many venues where SecuritySeal is the perfect choice.

The system is comprised of fire-retardant-impregnated foam which is factory pre-coated on both facing sides with an intumescent fire-proofing material. Each side then receives a top coat of waterproof, tamper-resistant polyurethane. The system is supplied compressed smaller than the width of the joint gap. A field-injected polyurethane sealant band seals the bellows to the substrate at the installation surface. Joins between each stick are executed using a field-applied polyurethane sealant at the bellows' edge of the joint and intumescent caulking on the foam face.

SecuritySeal functions as a watertight primary seal with movement capabilities of +/- 25% (50% total) available in widths for gaps ranging from 1-inch to 6-inches (25mm - 150mm). It is designed to be used in both retrofit and new structural expansion joints and in all other openings in vertical-plane applications.

## Pick-Resistant, Watertight, 2-Hour Fire-Rated, Sound Attenuating, Wall Expansion Joint

SecuritySeal is watertight, fire-rated, sound-attenuating, and energy-efficient. It is manufactured with a pick-resistant outer polyurethane seal for use in both retrofit and new structural expansion gaps in vertical-plane applications.

SecuritySeal eliminates the need for additional fire blankets, mineral wools, liquid sealants, cover plates, or other fire stopping materials.

## Twice the Movement of Pick-Resistant Liquid Sealants

Liquid sealants offered for security applications achieved their tamper resistance in part from their hardness. Hardness restricts movement. In general, pick-resistant liquid sealants have movement capability of +/- 12.5% or 25% total. Because of the bellows configuration of SecuritySeal, the tamper-resistant polyurethane sealant is not stretched or compressed as in typical field-applied "caulk and backer rod" installations. Instead, the bellows folds and unfolds with joint movement. This results in the ability to offer a full 50% total movement capability thereby extending the use of tamper-resistant sealant technology to structural movement joints.

## Uses


- Prisons
- Detention Centers
- Schools
- Psychiatric Facilities
- Daycare Facilities
- anywhere vandalism is a concern

For expansion joints in exterior and interior walls where a combination of pick-resistance, watertightness, fire-rating, sound attenuation and thermal-efficiency are required. It can be used alone or under any other expansion joint cover, plate or filler where depth of substrate allows. Its pick-resistant surface composition makes it an excellent choice where the integrity of the seal and tamper prevention is necessary.

SecuritySeal continues with the comprehensive EMSHIELD line of breakthrough, multifunction, structural expansion joint materials being released by EMSEAL. Tested and certified by Underwriters Laboratories (UL) and Underwriters Laboratories Canada (ULC), to the rigors of UL 2079, it can work in conjunction with the EMSHIELD horizontal fire-rated deck expansion joint, DFR2, and also the vertical silicone-coated wall expansion joint, WFR2.

This fire-rated expansion joint, in a single installation, provides a watertight, clean-handling, UV-stable, non-staining, low-temperature-flexible, high-temperature-stable, watertight, sound-attenuating, energy-efficient tamper-resistant, structural expansion joint seal.

EMSHIELD SecuritySeal builds on EMSEAL's track record of over 30 years of innovation in sealing structural expansion joints with impregnated foam sealants.

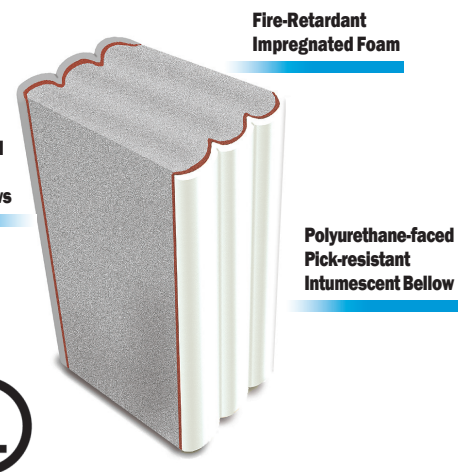

**EMSHIELD SecuritySeal**

## Product Features

### Secure Pick-Resistant Seal

The outer watertight layer is made of a hardened flexible polyurethane which resists deterioration and destruction from picking. This deters vandalism, dislodging of debris harmful to patients or inmates, and the ingestion of picked materials by young children.

### Watertight

All EMSEAL preformed-sealant expansion joint systems are manufactured to be "watertight by design". The acrylic-impregnated open-cell foam is factory pre-coated with water-resistant polyurethane which acts as the primary waterproof seal.

### Fire-Rated

It has been tested and certified by Underwriters Laboratories (UL) to the rigors of UL 2079. As a single unit 2-hour fire-rated expansion joint it eliminates the need for additional fire stops at the joint gap thereby eliminating the need for multiple products to perform the roles of sealing, bridging and fire-rating joints.

### Sound Suppression

A single-sided installation of standard 4-inch SecuritySeal yields a tested Sound Transmission Class rating of STC 62 in a STC 68 wall. It also receives an Outdoor-Indoor Transmission Class rating of OITC 52 in an OITC 52 wall.

### Non-Invasive Anchoring

There are no hard metal-to-substrate connections with SecuritySeal such as embedded pins, anchors, screws, bolts or tracks, trays or rails, flanges or coverplates. The system is locked to the joint faces by means of 1) the backpressure of the foam, 2) epoxy adhesive, and 3) the injected sealant bands at the joint face. This method of single-unit installation accommodates installation at later construction stages where access, positioning, or the existing infrastructure may interfere.

### Energy Efficiency

EMSEAL's foam technology also acts as an efficient thermal barrier. This means that indoor air quality and HVAC balance can be controlled while insulating the interior space from hot and cold exterior conditions. The non-metallic, non-invasive anchoring means that with SecuritySeal there are no thermal breaks introduced at structural or other joint openings.

### Joint-Size Variation

Uniform bellows appearance, and the ability to handle variations in joint size through size-switching.

## Colors

The two polyurethane faces of **EMSHIELD SecuritySeal** can be manufactured in either Tru White or Limestone to blend with the two wall surfaces.

## Bellows Configuration

Widths from 1" (25mm) to 1 1/2" (40mm) are sealed with single bellows seals. Widths from 1 3/4" (45mm) to 6" (150mm) are sealed with a multiple bellows seals.

## Performance

Capable of movements of +25%, -25% (50% total) of nominal material size.

Standard sizes from 1" (25mm) to 6" (105mm).

Depth of Seal for all sizes = 4" (100mm).

## SecuritySeal-SSW2 Sizing

Product Code	Nominal Joint Size	Material Size @ Mean Temp.)	Depth of Seal
SSW2-100-100-02	1 "	(25mm)	4 " (100mm)
SSW2-125-100-02	1 1/4"	(30mm)	4 " (100mm)
SSW2-150-100-02	1 1/2"	(40mm)	4 " (100mm)
SSW2-175-100-02	1 3/4"	(45mm)	4 " (100mm)
SSW2-200-100-02	2 "	(50mm)	4 " (100mm)
SSW2-225-100-02	2 1/4"	(55mm)	4 " (100mm)
SSW2-250-100-02	2 1/2"	(65mm)	4 " (100mm)
SSW2-275-100-02	2 3/4"	(70mm)	4 " (100mm)
SSW2-300-100-02	3 "	(75mm)	4 " (100mm)
SSW2-325-100-02	3 1/4"	(80mm)	4 " (100mm)
SSW2-350-100-02	3 1/2"	(85mm)	4 " (100mm)
SSW2-375-100-02	3 3/4"	(95mm)	4 " (100mm)
SSW2-400-100-02	4 "	(100mm)	4 " (100mm)
SSW2-425-100-02	4 1/4"	(105mm)	4 " (100mm)
SSW2-450-100-02	4 1/2"	(115mm)	4 " (100mm)
SSW2-475-100-02	4 3/4"	(120mm)	4 " (100mm)
SSW2-500-100-02	5 "	(125mm)	4 " (100mm)
SSW2-525-100-02	5 1/4"	(130mm)	4 " (100mm)
SSW2-550-100-02	5 1/2"	(140mm)	4 " (100mm)
SSW2-575-100-02	5 3/4"	(145mm)	4 " (100mm)
SSW2-600-100-02	6 "	(150mm)	4 " (100mm)

## Testing and Standards

**SecuritySeal** has been tested and certified under UL 2079. UL 2079, like ASTM E1966, was developed to encompass the fire testing of ASTM E119 and the movement cycling regime of ASTM E1399.

**SecuritySeal** meets the requirements of ASTM E1966, ASTM E119 and ASTM E1399.

EMSHIELD products have been tested and meet the air leakage requirements of ASTM E283, the water penetration requirements of ASTM E331, and the air pressure maintenance requirements of ASTM E330 all tested at greater than hurricane force winds with the foam expanded to its maximum expanded size.

## Warranty

Standard or project-specific warranties are available from EMSEAL on request. This product can only perform its designed function if it, and the joint-gap into which it is installed, is sized to suit anticipated joint movements in consideration of the movement capability of the product and in consideration of the temperature at time of installation, and if it is installed in strict accordance with EMSEAL's installation instructions.

## Availability & Price

**EMSHIELD SecuritySeal** is available for domestic or international shipment. Prices are available from local representatives and/or directly from the manufacturer. The product range is continually being updated, and accordingly EMSEAL reserves the right to modify or withdraw any product without prior notice.